
Operation Manual

Desk-Lite 121




Fixture Assembly



DES-121-120
Desk-Lite 121, 120VAC

DES-121-230
Desk-Lite 121, 230VAC



LVR-D121-B
12" Desk-Lite 121 Louver/Black (Included)

True Match® Lamps



122-K32 12" Kino KF32

122-K55 12" Kino KF55

Inserting Lamps



Turn power off before inserting or changing out the lamp.

Ensure the black insert on the lamp holder is aligned vertically to accept a lamp.



Insert the lamp into the lamp holder and rotate $\frac{1}{2}$ turn.

Inserting Louver



The louver is held in place by Velcro tabs located at each corner of the louver.

Fixture Operation



On/Off switch is lighted when power is present.

Turn power off before inserting or changing lamp.

Fuse: Replace with 2.0A time delay fuse.

Caution

For Desk-Lite 121, 120VAC only

To reduce the risk of fire, electric shock or injury to persons:

- a) Use only insulated staples or plastic ties to secure cords;
- b) Route and secure cords so that they will not be pinched or damaged when the cabinet is pushed to the wall;
- c) Position the portable cabinet light with respect to the cabinet so the lamp replacement markings are able to be read during relamping;
- d) Not intended for recessed installation in ceilings, or soffits; and
- e) The National Electrical Code (NEC) does not permit cords to be concealed where damage to insulation may go unnoticed. To prevent fire danger, do not run cord behind walls, ceilings, soffits, or cabinets where it may be inaccessible for examination. Cords should be visually examined periodically and immediately replaced when any damage is noted.

Applying Gels and ND



Option #1

Cut gel or Neutral Density filter to 13.5" x 4" (34 x 10cm).



Use adhesive tape to secure the gel to the outside of the fixture.

Ensure that the air vents are not obstructed.



Option #2

Cut the gel to 12.25" x 3.25" (31 x 8cm) and place it inside the fixture with the natural curl of the gel pointing down.



Insert the louver to hold the gel in place.

Mounting



Adjustable hinge mount has two screw holes for mounting the fixture to a flat surface.



Screws for mounting are included with the fixture.



Fixture hinge tension is adjusted by the central Phillips head screw.

Fixture Components & Lamps



LVR-121-B 12" Desk-Lite 121 Louver/Black


True Match® Lamps



122-K32 12" Kino KF32

122-K55 12" Kino KF55

Fixture Specifications

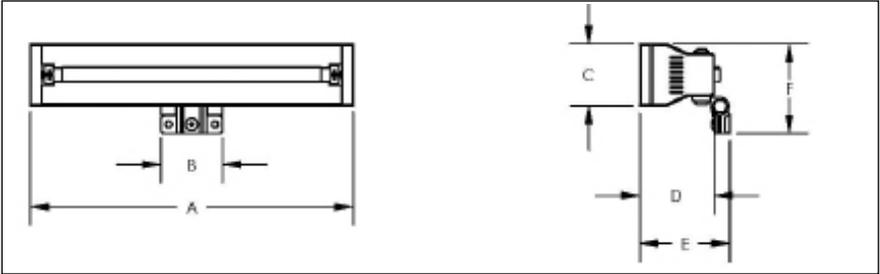

Model	A	B	C	D	E	F
Desk-Lite 121	13.25"	2.5"	2.5"	3"	3.5"	3.75"
	330mm	63mm	63mm	76mm	89mm	95mm

Fixture Specifications



Desk-Lite 121

- Input Voltage:** 120VAC or 230VAC 50/60Hz
- Output Frequency:** 48kHz
- Amperage:** 0.3A at 120VAC
0.1A at 230VAC
- Lamp Switching:** On/Off
- Weight w/ Lamp:** 1.6 lb (0.75kg)
- Dimensions:** 13 x 3 x 2.5"
(33 x 7.6 x 6.4cm)
- Lamp Type:** F8T5 12" (305mm)

For latest Warranty information and Certifications,
see Kino Flo website at www.kinoflo.com.

Environmental: Disposal of Old Electrical & Electronic Equipment.



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. This product is made of recyclable materials and should be disposed of in accordance with governmental regulations.

Kino Flo, Inc. 2840 N. Hollywood Way, Burbank, CA 91505, USA
Tel: 818 767-6528 website: www.kinoflo.com