

Single



▼ Photometrics

4ft Single

FC	171	56	27	15.5	10	7	5	4	3	2.5
Feet	2	4	6	8	10	12	14	16	18	20

2ft Single

FC	62	17	7.5	4.5	3	2	1.5	1	0.9	0.7
Feet	2	4	6	8	10	12	14	16	18	20

4ft Single

LUX	2379	817	409	239	155	109	81	62	50	40
Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5

2ft Single

LUX	969	262	125	71	45	32	24	18	14	12
Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5


▼ Fixture Specifications

Fixture	Lamp	Lamp Type	Dimensions	Weight w/ Lamp
4ft Single	1	F75/T12	52 x 4.5 x 3.5" w/ 3.5" barndoors (132 x 11.5 x 9cm w/ 9cm barndoors)	4.3 lb (1.9kg)
2ft Single	1	F40/T12	27 x 4.5 x 3.5" w/ 3.5" barndoors (69 x 11.5 x 9cm w/ 9cm barndoors)	2.7 lb (1.2kg)

▼ Ballast Specifications

Ballast	Input Voltage	Output Frequency	Amperage	Lamp Switching	Output Switching	Dimensions	Weight
Single Select	120VAC 50/60Hz	25kHz	F75/1.3A, F40/0.9A, F30/0.7A	1-Off	2ft/4ft	11 x 2.5 x 2.5" (28 x 6.5 x 6.5cm)	2 lb (0.9kg)
Single Select	230VAC 50/60Hz	25kHz	F75/0.7A, F40/0.5A, F30/0.4A	1-Off	2ft/4ft	10.5 x 4 x 3" (26.5 x 10 x 7.6cm)	2.6 lb (1.2kg)

▼ Details

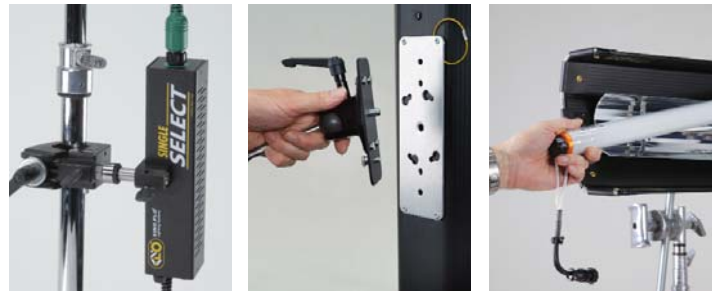

The Single portable lighting system comes in a slender package but delivers ample light for challenging spaces such as set practicals or auto interiors. Single systems feature:

The 1-Lamp Fixture

- Built-in Barndoors
- Removable Lamp Harness, Reflector and Louver
- Twist-on, locking Center Mount
- True Match® daylight and tungsten lamps

The High Output Ballast

- HO/Standard switching
- Flicker-free, remote operation
- Instant-on, dead quiet

▼ Single Systems



CFX-4801

4ft Fixture

CFX-2401

2ft Fixture

MTP-KL41

Kino 41L Mount
w/ 3/8" Pin (10mm)

X04-25

Extension, 25ft

BAL-105-S120

Select Ballast, 120VAC

BAL-115-230

Select Ballast, 230VAC

▼ Single Accessories



MTP-BL41

Kino 41L Mount
w/ Baby Receiver (16mm)

MTP-BL41S

Kino 41L Mount
w/ Baby Short (16mm)

MTP-BAL

Kino Ballast Baby Mount
(16mm)

X04-12

Extension, 12ft

X04-A9

Single to Double Combiner

X04-A16

Single to 4Bank Combiner