

2840 N. Hollywood Way
Burbank, CA U.S.A. 91505-1023
Tel: +1 (818) 767-6528
Fax : +1 (818) 767-7517
www.kinoflo.com



6800037 - Mini-Flo 139X Ballast Board

[Click here](#) for Mini-Flo 139X Electronic Schematics with test points.


Overview

Used in Mini-Flo BAL-139 and BAL-139X

(6800037) - Mini Flo 139X Ballast Board Out of Warranty - Last date of Mfg September 2014

Manufacturing started Feb 2002.
1 Year Warranty – Based on Serial Number.

Mini-Flo 139X Ballast Board (Part # 6800037) Top View

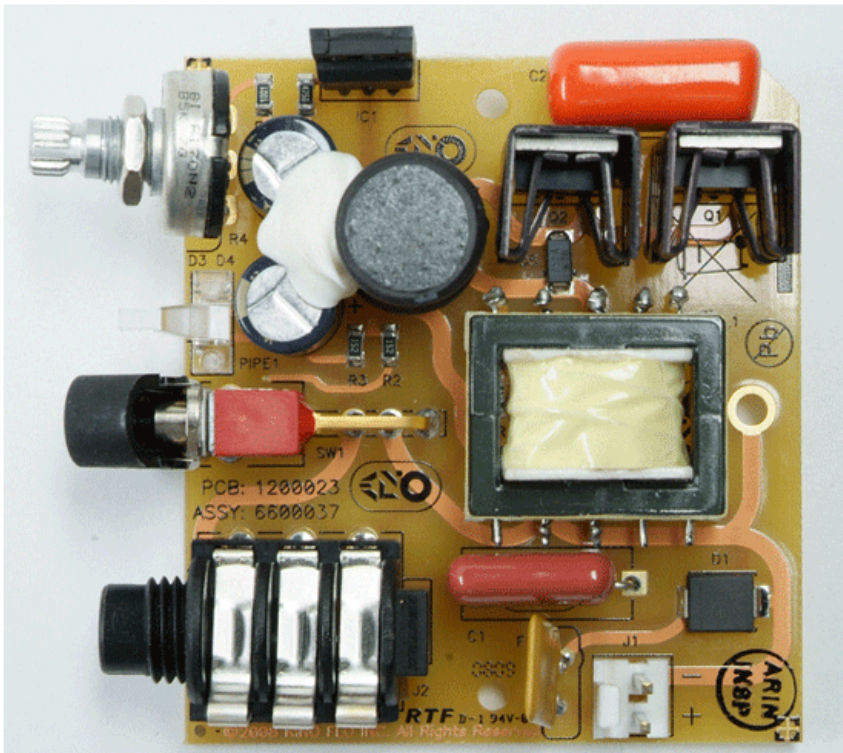

Electrical Components (Mini-Flo 139X)

Board Location	Kino Flo Part #s	Description	Component Value	UM	Qty/Board
D5	1050025	Zener	ZM4752A - 33V 1W	EA	1
D1 No longer available	1050036	TVS, Unidirectional	SMCJ20A - 20V	EA	1
D6, D7	1050056	Diode	US1M - 1000V 1A	EA	2

POT1	1060031	0.1W POT	5K	EA	1
Q1, Q2	1080017	NPN Transistor	TIP41C	EA	2
IC1 No longer available	1110042	Voltage Regulator	LM317P	EA	1
Q1, Q2 No longer available	1240004	Transistor Heatsink	-	EA	2
J2	1270236	Phone Jack	-	EA	1
SW1	1290033	Switch, Right Angle	-	EA	1
F1	1350003	Polyswitch, Circuit Breaker	-	EA	1

2021-07-14