




OLD HINGE REMOVAL:


UNSCREW THE SET SCREWS FROM EACH END AND PULL OUT THE DAMAGED HINGE WIRE FROM THE SILVER CONDUIT.
SAVE THE SET SCREWS FOR RE-INSTALLATION.

NEW HINGE WIRE INSTALLATION

- 1) Install the set screw into one end of the fixture and tighten until flush with fixture.



- 2) Flatten fixture. Cut the new hinge wire 3/4" (19 mm) shorter than the total length of the fixture.

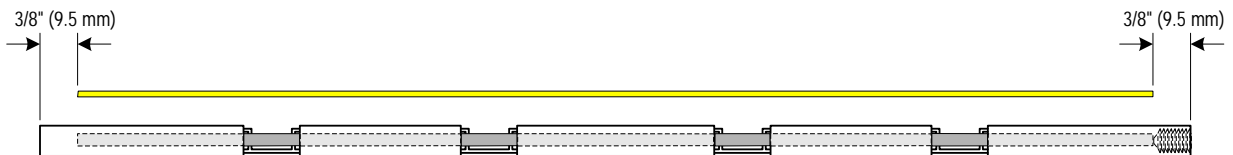

- 3) Pass new hinge wire through silver conduit channel until it reaches the set screw.



NOTE: DO NOT FLEX THE FIXTURE UNTIL THE HINGE WIRE IS COMPLETELY INSTALLED!

- 4) Install a set screw at opposite end to secure the wire.

