

Product Description

Celeb IKON6 is a powerful IP65-rated softlight designed for use in any indoor or outdoor environment and incorporates our latest technical innovation: a new RGB-cW-wW LED engine capable of driving full power at all white and color points.

Confidently move from warm to daylight tones and solve color rendering challenges with an LED system equipped with two new and improved full-spectrum white sources that deliver the broadest spectrum white light available on the market.

Celeb IKON6 gives you access to the exact look you want to achieve on camera. Instantly perfect close-ups with confidence backed by years of research and development to optimize LED selection for professional motion picture cameras. Unlock your creativity with fully saturated hue angle and saturation adjustment as well as individual RGB control for custom colors.


Key Features

- RGB-cW-wW LED Engine with improved White and Color Space Spectrums
- IP rated softlight for indoor/outdoor use
- 8 independently controlled zones
- Control Protocols: Wireless DMX, RDM, sACN, ArtNet, 5-Pin XLR DMX In/Out, Ethercon In/Out,
- DMX and Ethernet Data Pass Thru
- Built-in wireless CRMX Control
- Removable Diffusion
- USB-C for storing / loading presets
- Firmware updates via ethernet (ftp) and USB-C
- DC battery input via 3 pin XLR
- Jr Pin mount and feet for staging, mounting, and hanging
- Touch screen menu and control dial
- Integrated power supply with PowerCON TRUE1 in / out ports for daisy chaining (no external ballast)




Specifications


- 600 watts of Power to all white and color points
- CCT Range: 2500°-9900°K
- TLCI: 99
- TM-30 Rg: 99.3
- TM-30 Rf: 95.7
- IP65 dust tight and water resistant
- Battery Voltage: 48VDC
- Beam Angle: 108°
- Weight: 40 lbs / 18.1 kg
(with yoke, jr pin and diffusion)

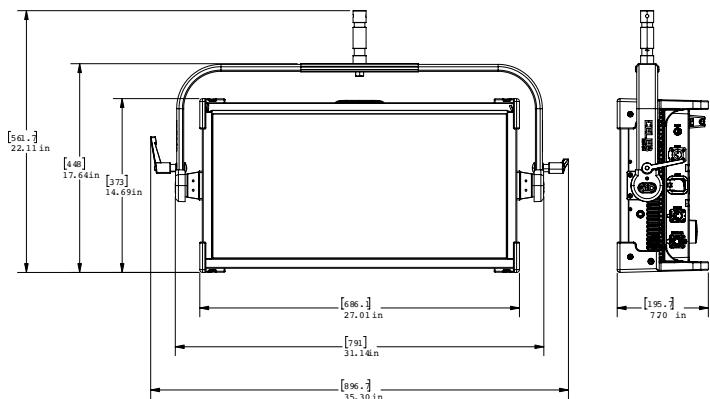


Spectral Distribution - 3200K

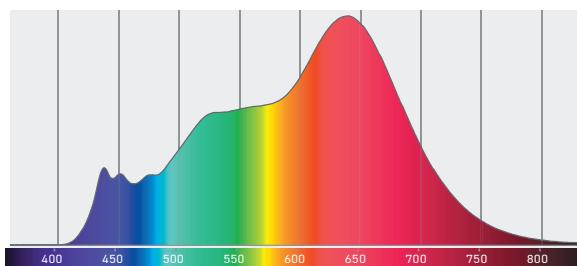


Spectral Distribution - 5600K

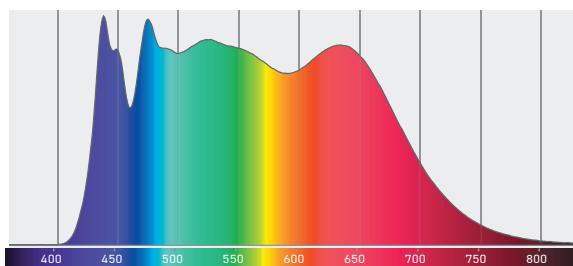

Beam Details - 3200K

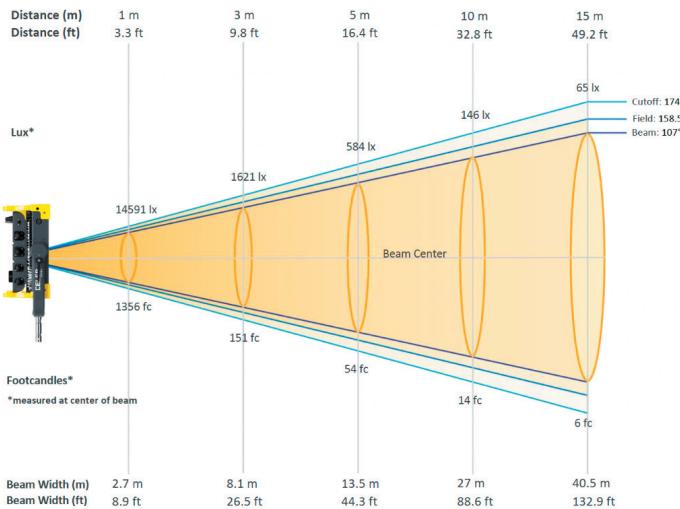

Beam Details - 5600K

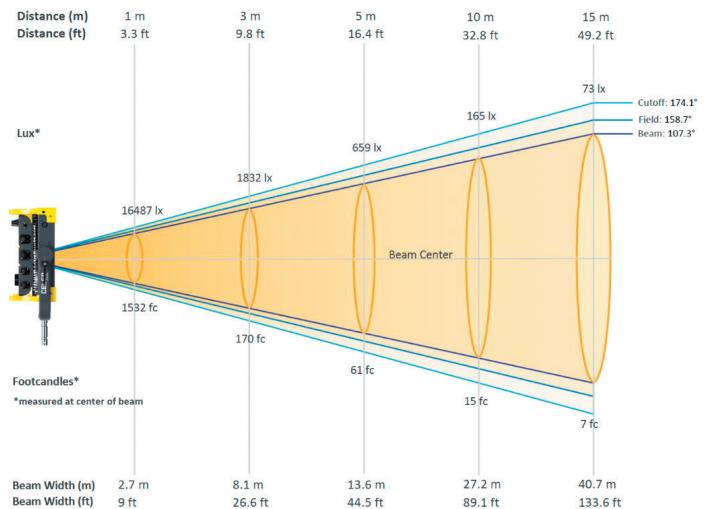

Beam Intensities - 3200K

Distance	1m	3m	6m	9m	12m	15m
Lux	14591	1621	405	180	101	65
Distance	3.3ft	9.8ft	19.7ft	29.5	39.4	49.2
FC	1356	151	38	17	9	6

Beam Intensities - 5600K

Distance	1m	3m	6m	9m	12m	15m
Lux	16487	1832	458	204	114	73
Distance	3.3ft	9.8ft	19.7ft	29.5ft	39.4ft	49.2ft
FC	1532	170	43	19	11	7