

Mega Double



▼ Photometrics

8ft Double	FC	314	132	73	45	30	22	16.5	13	10.5	8.5
	Feet	2	4	6	8	10	12	14	16	18	20

6ft Double	FC	292	111	55	33	22	16	12	9	7	6
	Feet	2	4	6	8	10	12	14	16	18	20

8ft Double	LUX	4166	1906	1055	678	458	331	254	200	163	131
	Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5

6ft Double	LUX	3983	1597	829	506	337	241	182	142	114	92
	Meters	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5


▼ Fixture Specifications

Fixture	Lamps	Lamp Type	Dimensions	Weight w/ Lamps
8ft Mega Double	2	F120/T12	97 x 7.5 x 3.5" w/ 3.5" barndoors (246.5 x 19 x 9cm w/ 9cm barndoors)	10 lb (4.5kg)
6ft Mega Double	2	F100/T12	73.5 x 7.5 x 3.5" w/ 3.5" barndoors (186.5 x 19 x 9cm w/ 9cm barndoors)	9.2 lb (4.1kg)

▼ Ballast Specifications

Ballast	Input Voltage	Output Frequency	Amperage	Lamp Switching	Output Switching	Dimensions	Weight
Mega Double	120VAC 50/60Hz	25kHz	F120/3.7A F100/3.1A	1-2	HO/Std	9.5 x 9 x 3" (24 x 23 x 7.6cm)	3.5 lb (1.6kg)
Mega Double	230VAC 50/60Hz	25kHz	F120/2.2A F100/1.7A	1-2	HO/Std	9.5 x 9 x 3" (24 x 23 x 7.6cm)	4.2 lb (1.9kg)

▼ Details

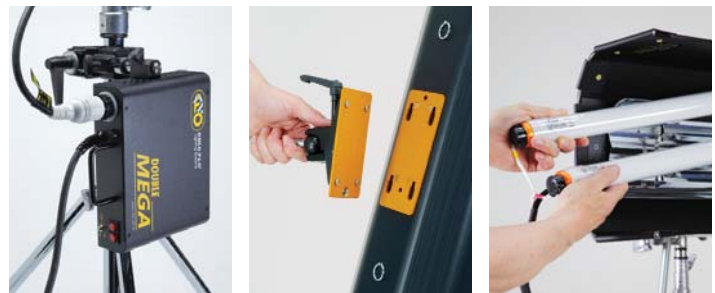

The 8ft and 6ft Mega Double portable lighting systems are ideal for practical lighting in large areas such as warehouses or super markets where they can reproduce natural ambient light. Mega Double features:

The 2-Lamp Mega Fixture

- Built-in Barndoors
- Removable Reflector, Louver and Lamp Harness
- Slide-on Center Mount
- True Match® daylight, tungsten

The High Output Ballast

- Flicker-free, remote lamp control
- HO/Standard switching
- Instant-on, dead quiet
- Remote operation

▼ Mega Double Systems



CFX-9602
8ft Fixture




CFX-7202
6ft Fixture



MTP-KM
Kino 81 Slide-on Mount
w/ Junior Pin (28mm)



X09-25M
Extension, 25ft



BAL-215-M120
Mega Ballast, 120VAC

BAL-215-M230
Mega Ballast, 230VAC

▼ Mega Double Accessories



MTP-BAL
Kino Ballast Baby Mount
(16mm)



X09-A7M
Mega Double to Mega Single
Splitter



X09-A19M
Mega Double to Mega 4Bank
Combiner