


VG5R Ballast Board

(Part # 6800177)



(Top View)

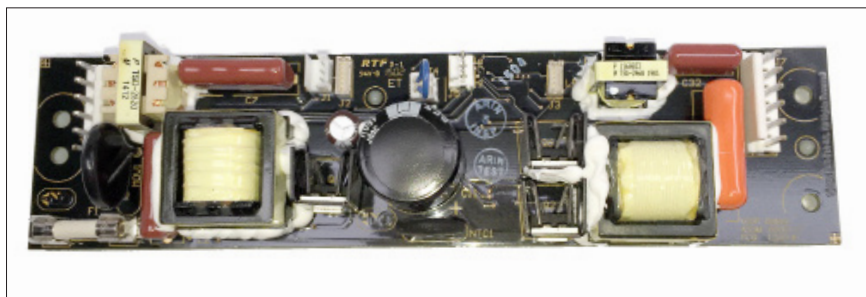


(Bottom View)

The **VG5R** ballast board is to be used as a replacement ballast board for all VG series in the following Universal products: Single, Double, 4Bank, Image 47, 87 Universal and non-Universal products. For latest warranty information, see Kino Flo website www.kinoflo.com



Shorting Plug #6350014

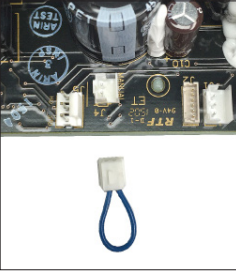

6350014


All Non-DMX products that use(d) VG ballast boards must use Shorting plug part #6350014 (included with VG5R). Remove shorting plug for all DMX products. The DMX wiring harness is used in its place.

Ballast Board Removal and Installation



4Bank DMX Ballast (BAL-457-120U) is shown for illustration purposes.




1) Remove twelve (12) cover screws.

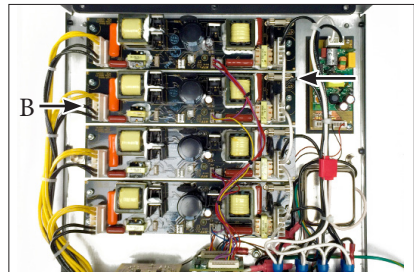

2) Remove AC input connector (A).
Then remove lamp output connector (B).

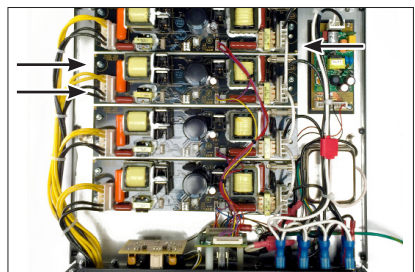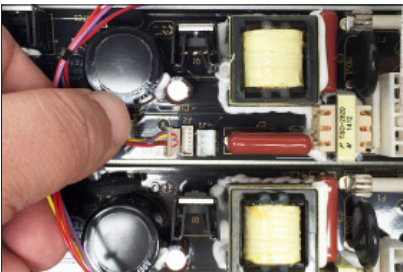

3) Remove DMX connector.

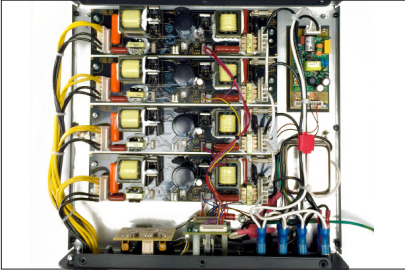

5) Install new ballast board, three (3) nuts, lamp output and DMX connectors. Then connect AC input connector.

4) Remove three (3) nuts and remove board.



6) Install twelve (12) cover screws.

For latest Warranty information and Certifications,
see Kino Flo website at www.kinoflo.com.

Environmental: Disposal of Old Electrical & Electronic Equipment.



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. This product is made of recyclable materials and should be disposed of in accordance with governmental regulations.

Kino Flo, Inc. 2840 N. Hollywood Way, Burbank, CA 91505, USA

Tel: 818 767-6528 website: www.kinoflo.com