

Product Description

Diva Lux 4 is a bright, energy-efficient softlight designed to deliver best-in-class white light and color space spectrums in any indoor environment. An innovative new RGBwWcW LED engine drives Diva Lux 4's full power at all white points and nearly all color points, and incorporates two new and improved full-spectrum white sources that offer the highest quality soft white light on the market.

Dial in your look with True Match® firmware that enables easy on-board control and facilitates remote configuration and operation via RDM and DMX. LumenRadio wireless DMX comes standard, with the option to choose Multiverse wireless DMX at the time of purchase or change any time through our service center.

Diva Lux 4 puts the broadest spectrum white light and the fullest color spectrum within reach for broadcast studios, houses of worship, and film/TV lighting.

Key Features


- RGBwWcW LED Engine with improved White Space and Color Space Spectrums
- 4 independently controlled zones
- Built-in wireless CRMX Control – Factory swappable to City Theatrical Multiverse
- Control Protocols: Wireless DMX, RDM, sACN, ArtNet, 5-Pin XLR DMX In/Out, Ethercon In/Out, DMX and Ethernet Data Pass Thru
- Removable Diffusion
- Touch screen menu and control dial
- Firmware updates via USB-C
- Jr Pin mount and feet for staging, mounting, and hanging

Specifications


- 400 watts of power to all white points and most color points
- TLCI at 3200K & 5600K: 99
- TM-30 Rf(3200K & 5600K): 96
- CCT Range: 2500K - 9900K
- Beam Angle: 106°
- Weight: 32.9lbs / 14.9kg (with yoke, Jr pin and diffusion)
- Power Draw 500W
- Voltage Range 100-240VAC / 48V DC




Dimensions

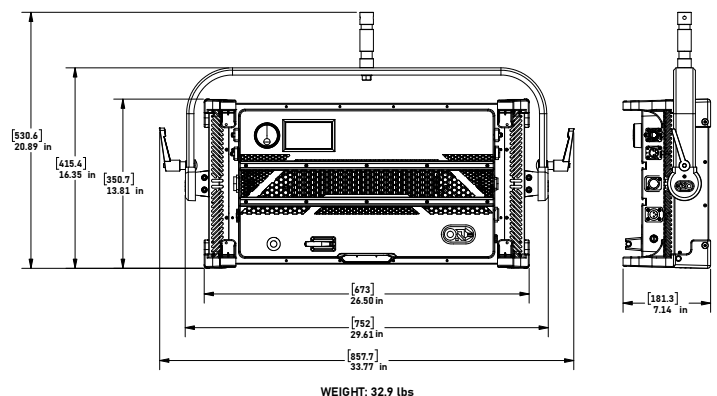


Spectral Distribution - 3200K

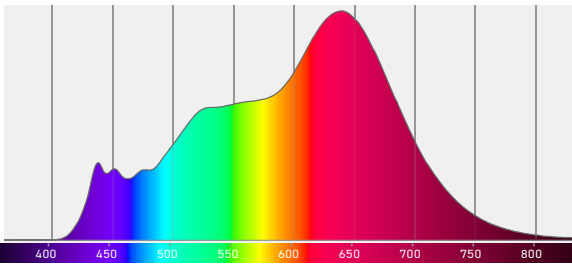


Spectral Distribution - 5600K

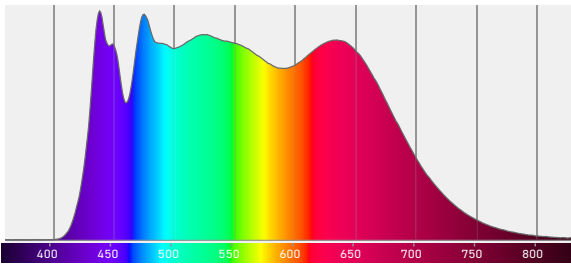

Beam Details - 3200K

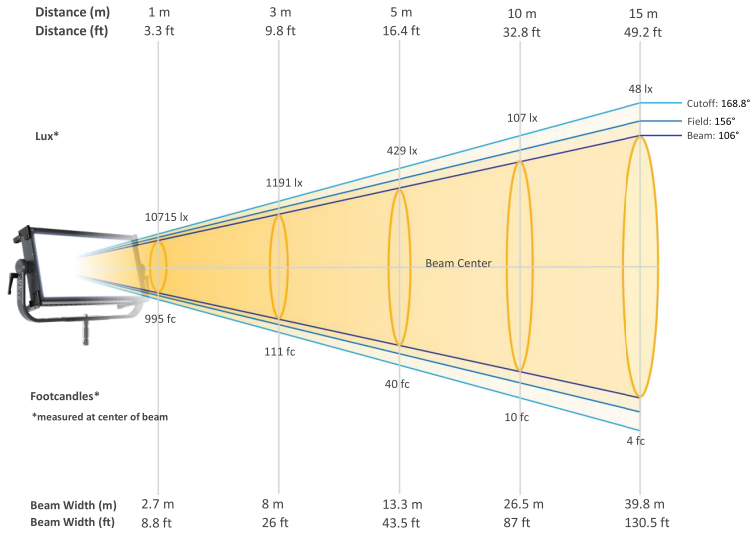

Beam Details - 5600K

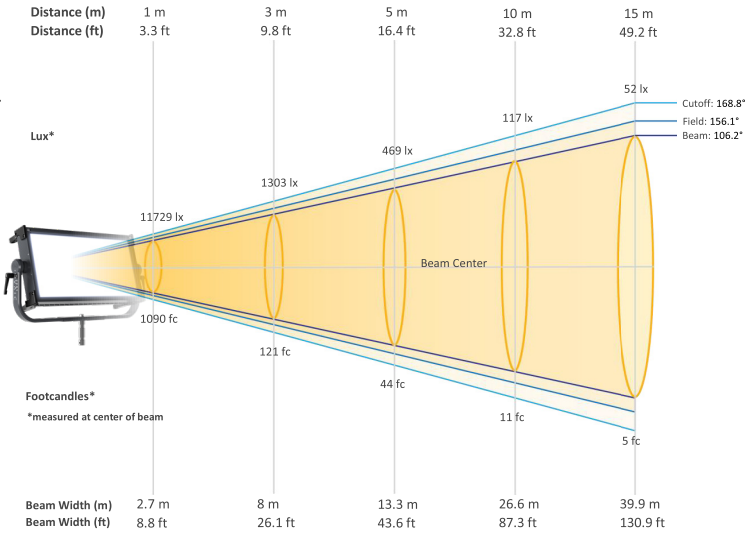

Beam Intensities - 3200K

Distance	1m	2m	3m	4m	5m	6m	7m	8m	9m	10m
Lux	10715	2679	1191	670	429	298	219	167	132	107
Distance	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
Lux	89	74	63	55	48	42	37	33	30	27
Distance	3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft
FC	995	249	111	62	40	28	20	16	12	10
Distance	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
FC	8	7	6	5	4	4	3	3	3	2

Beam Intensities - 5600K

Distance	1m	2m	3m	4m	5m	6m	7m	8m	9m	10m
Lux	11729	2932	1303	733	469	326	239	183	145	117
Distance	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
Lux	97	81	69	60	52	46	41	36	32	29
Distance	3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft
FC	1090	272	121	68	44	30	22	17	13	11
Distance	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
FC	9	8	6	6	5	4	4	3	3	3